

AUTO-PIN-LOADING INJECTION MOLDING MACHINE FOR HEEL

A COMPLETE SOLUTION OF HIGH HEEL PRODUCTS!!

→ **Automatically Needle Loading**

Fully automatic ejector for production efficiency , free from any danger caused by manual operation.

→ **Molding two heels in different size at the same time**

Two different sets of heat system for injection nozzles, adjustable SSR, will generate balanced flow when two different molds are in production.

→ **Two adjustable nozzles with hot-runner**

Hot runner is set in the head of barrel and the nozzles length can be adjusted automatically. Easy to flush.

→ **Quick water-cooling tank with conveyor**

→ **Complete Protection for safety**

Hydraulic oil & material temp. monitored, Low pressure for mold protection, Mechanical and electrical double protection for mold closing safety

→ **Multi-section injection proportionally control**

4 sec. Injection pressure & 3 sec. Holding pressure can be chosen according to different production.

→ **PC-BASE controller & LCD monitor**

With 2 sets of linear-meter in Clamping system & injection system, the temp. , pressure, flow are adjustable with the panel button

→ **Precise P+D temperature control**

→ **60 sets of producing condition memory**




Reduce the training time & machine adjusting when mold exchange.

→ **Proportional pressure valve and VICKER'S high efficiency direction valve**

Low noise, low power consumption, and smooth operation. Fine adjustment may be carried from computer and easy operation.

→ **Hydraulic clamping system**

Solid, quick and smooth mold closing.

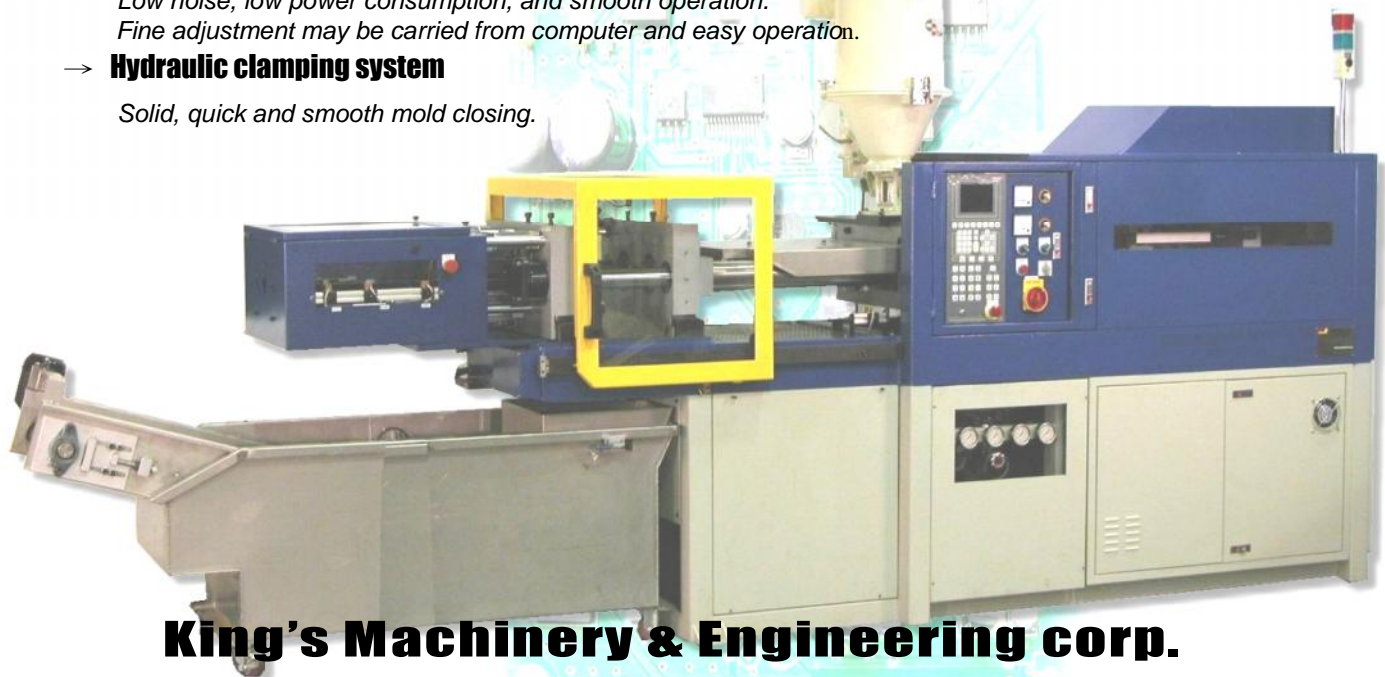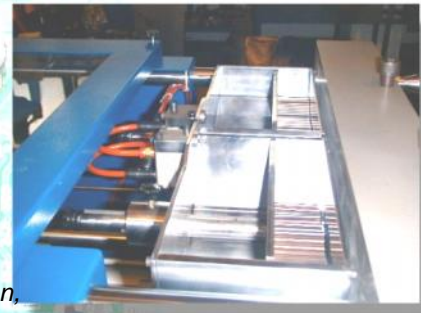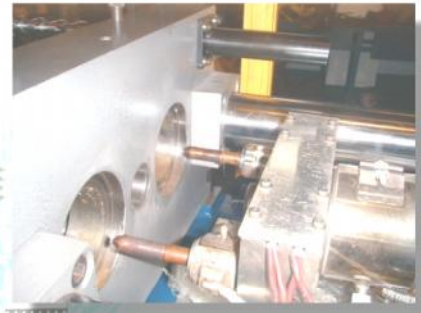

King's Machinery & Engineering corp.

Web Site: WWW.INJECTION.COM.TW E-MAIL: kingsc@ms22.hinet.net

Address.: No 259, You Heng Street, Tao Yuan City, Tao Yuan County, TAIWAN.

Phone: 886-3-3254812~3, Fax: 886-3-3250106